Installation instruction

ARAT Special display mount for Navigation Systems

Part-No.: NS 1566
for VDO Dayton, MS 3000, 3100, 3200

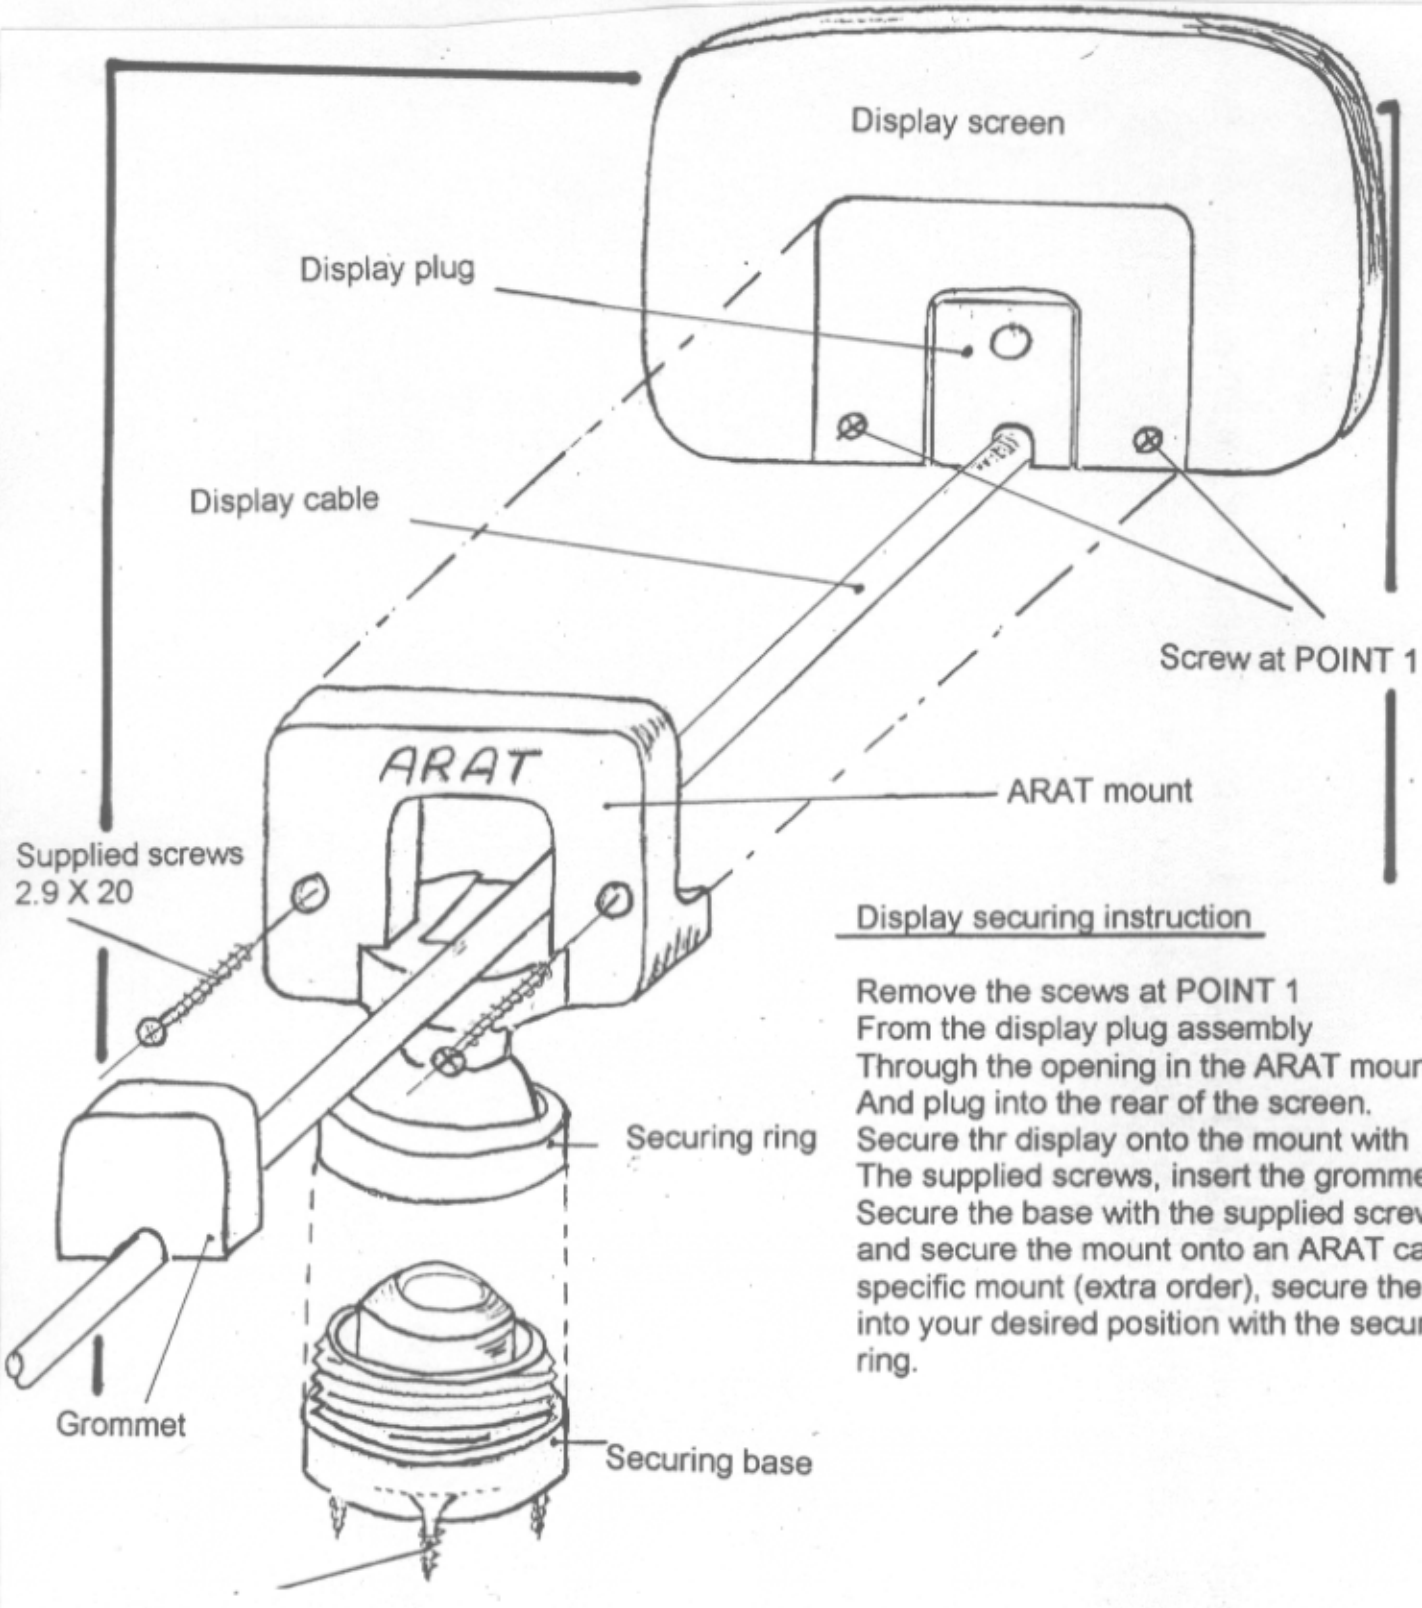

Display securing instruction

Remove the scews at POINT 1
From the display plug assembly
Through the opening in the ARAT mount
And plug into the rear of the screen.
Secure thr display onto the mount with
The supplied screws, insert the grommet,
Secure the base with the supplied screws,
and secure the mount onto an ARAT car
specific mount (extra order), secure the mount
into your desired position with the securing
ring.

ARAT GmbH-Hauptstrasse-33758 Stukenbrock, Germany Tel: (+49) 5207-8952-52 Fax. (+49) 5207-8952-68
E-mail. info@arat.de Website. www.arat.de